




# Plug-in type 5-port solenoid valve RS series

## ■ Easy to check operation status

Solenoid A - red LED lamp  
Solenoid B - green LED lamp


## ■ Various wiring

D-sub connector, flat cable  
and SI unit are available.



## ■ Easy to change the wiring direction

It's easy to change the wiring to vertical or horizontal direction.

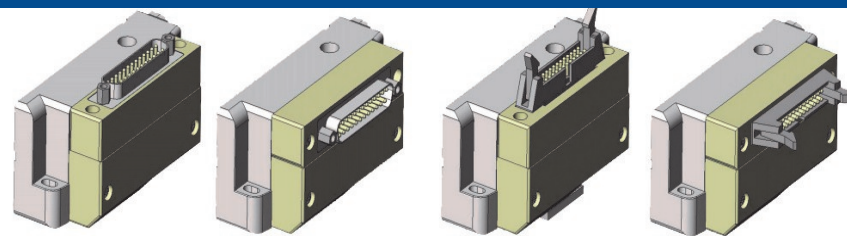

## ■ Number of stations

Single solenoid valve : up to 24 stations.  
Double solenoid valve : up to 12 stations.

## ■ High speed response time


: less 12ms

## ■ Effective section area

: over 0.22Cv

## ■ Easy to replace fittings

Ø3,Ø4,Ø6,Ø8mm, Ø5/32",  
Ø 1/4", Ø 5/32", Ø 5/16"  
available.

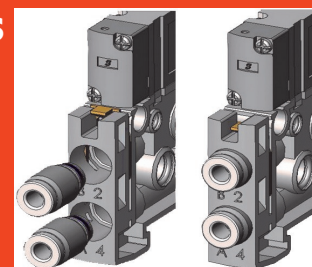

## Web page

[www.tpcpage.com](http://www.tpcpage.com)

Please [click here](#) to  
download the catalog of  
RS series(plug-in type 5 port  
solenoid valve)

## Contact information

Contact person : Jimmy Cho

Email: [jimmy@tanhay.com](mailto:jimmy@tanhay.com)

Tel : +82-2-2691-8888

Fax : +82-2-2699-2225

South Korea.







# 5-port pilot type solenoid valve DV series

■ **Quick response time and large flow capacity**  
: Less than 12ms and 2.5times larger flow capacity


■ **Easy wiring** : Non-polar type coil.  
■ **Built-in fitting** - body ported type

■ **Long durability**  
※ Wear ring: preventing one side wear on spool.  
※ U packing: minimizing frictional resistance.  
※ Piston return type.

■ **Low power consumption**  
: 0.85W(24V DC, 41mA)

■ **Copper free** : basic option  
■ **Built in LED-lamp**

■ **External pilot type available.**

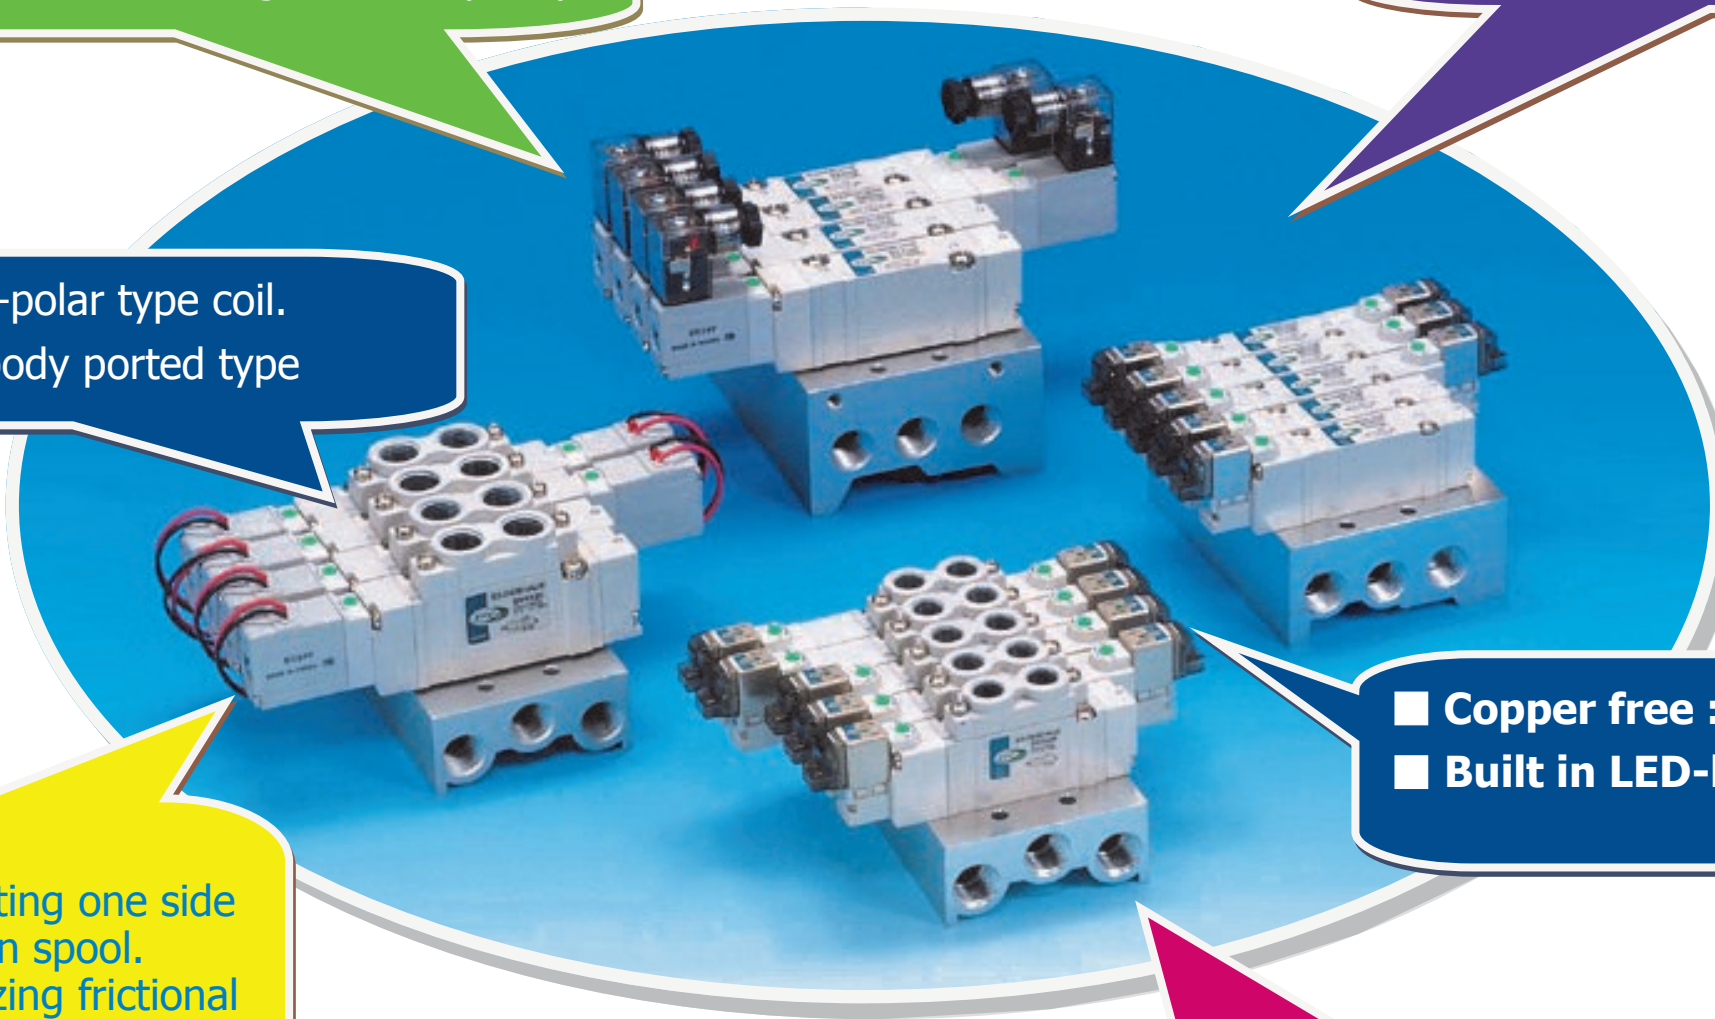

**Web page**  
[www.tpcpage.com](http://www.tpcpage.com)

Please [click here](#) to download the catalog of DV valve series.



**Contact information**  
Contact person : Jimmy Cho  
Email: [jimmy@tanhay.com](mailto:jimmy@tanhay.com)

Tel : +82-2-2691-8888  
Fax : +82-2-2699-2225  
South Korea.